



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 :  
G02F 1/1335, F21V 8/00

A1

(11) International Publication Number: WO 99/22268

(43) International Publication Date: 6 May 1999 (06.05.99)

(21) International Application Number: PCT/IB98/01572

(22) International Filing Date: 8 October 1998 (08.10.98)

(30) Priority Data:  
97203348.4 28 October 1997 (28.10.97) EP

(71) Applicant: KONINKLIJKE PHILIPS ELECTRONICS N.V.  
[NL/NL]; Groenwoodseweg 1, NL-5621 BA Eindhoven  
(NL).

(71) Applicant (for SE only): PHILIPS AB [SE/SE]; Kottbygatan 7,  
Kista, S-164 85 Stockholm (SE).

(72) Inventors: CORNELISSEN, Hugo, John; Prof. Holstlaan 6,  
NL-5656 AA Eindhoven (NL). BROER, Dirk, Jan; Prof.  
Holstlaan 6, NL-5656 AA Eindhoven (NL).

(74) Agent: RAAP, Adriaan, Y.; Internationaal Octroobureau B.V.,  
P.O. Box 220, NL-5600 AE Eindhoven (NL).


(81) Designated States: CN, JP, European patent (AT, BE, CH, CY,  
DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT,  
SE).

**Published**

*With international search report.*

*Before the expiration of the time limit for amending the  
claims and to be republished in the event of the receipt of  
amendments.*

(54) Title: DISPLAY DEVICE

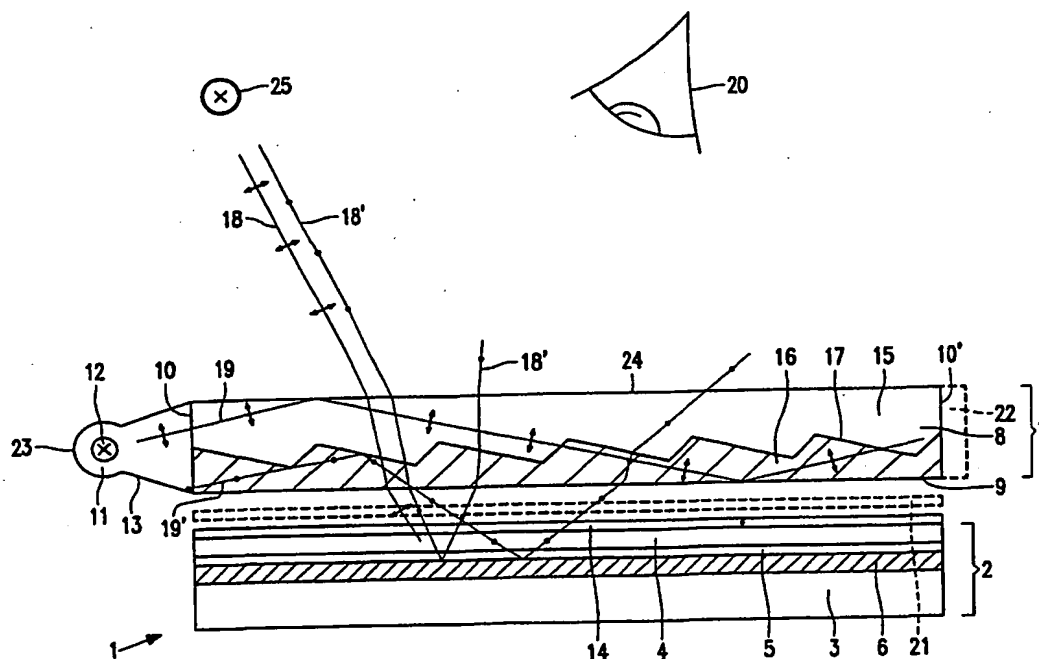**(57) Abstract**

Transflective display device provided with a waveguide which separates light entering from the side or from above into two mutually perpendicular directions of polarization. Polarization separation is obtained at the interface between materials of the waveguide having the same refractive index for one polarization direction and different refractive indices for the other polarization direction.

BEST AVAILABLE COPY

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

Display device.

The invention relates to a display device comprising a display panel with a first substrate provided with electrodes at the location of pixels, a second light-transmitting substrate and liquid-crystalline material between the two substrates, an illumination system which is situated on the side of the second substrate facing away from the liquid-crystalline material and which includes a light guide of an optically transparent material having an exit surface facing the display panel and a number of end faces, an entrance face for light being situated opposite at least one of said end faces, whereby the light can be coupled in at that end face of the light guide.

Such reflective display devices are used, for example, in portable equipment such as laptop computers, mobile telephones, personal organizers etc. With a view to saving energy, it is desirable that the light source can be turned off when there is sufficient ambient light.

A display device of the above-mentioned type is described in "Compact Front Lighting for Reflective Displays", SID 96 Applications Digest, pp. 43-46. In said document a description is given of a light guide to which an optical compensator is added to preclude image distortion due to a groove structure (microprisms) on the viewer's side of the light guide. Image distortion can be attributed to the fact that the groove structure has different slopes, which results in multiple images. The groove structure is necessary to deflect light rays in the direction of the display panel. In said publication, multiple images are precluded by providing an optical compensator having a complementary groove structure.

In order to function properly, the air gap between both component parts (the light guide and the optical compensator) must have a small accurately defined thickness (obtained, for example, by means of spacers) throughout the plane. This requires a very accurate mounting step, while each local variation in thickness of the air gap gives rise to variation in optical behavior and image distortion.

It is an object of the invention to provide, inter alia, a solution to the above problem.

To achieve this, a display device in accordance with the invention is characterized in that a polarizer is situated between the light guide and the display panel, and

the light guide comprises polarizing means for polarizing the incoming light.

The polarizer may be integrated in the display device.

The function of the polarizing means is, on the one hand, similar to that of the groove structure in the known device, i.e. deflecting light rays originating from the light source in the direction of the display panel, while, on the other hand, only polarized light is passed at the exit surface. The polarized light is subsequently passed by the polarizer (in this case the directions of polarization of the polarizing means and the polarizer are presumed to be identical). For this purpose, the polarizing means are preferably situated at the location of an exit surface of the light guide.

Reflected light which is passed by the polarizer is also passed, in the direction of the viewer, by the polarizing means and the other part of the light guide. As the polarizing means are integrated in the light guide, the above-mentioned mounting step can be dispensed with (and variation in optical behavior no longer occurs).

Light beams incident from the viewer's side, which are incident at an angle (with the normal) which is smaller than the critical angle at the light guide-air interface, are coupled out irrespective of their direction of polarization. The polarizer passes light of the proper polarization, which light is subsequently reflected by the reflective electrodes of the display panel and passed again by the polarizer and the light guide.

As a result of polarization, an unpolarized beam originating from the light source is separated into two mutually perpendicularly polarized beam components. Such a polarization separation is obtained, for example, by making the unpolarized beam impinge on an interface between a region with isotropic material of refractive index  $n_p$  and a region with anisotropic material of refractive indices  $n_o$  and  $n_e$ , where one of the two indices  $n_o$  or  $n_e$  is equal or substantially equal to  $n_p$ . If an unpolarized beam is incident on such an interface, the beam component which does not notice a difference in refractive index at the transition between isotropic and anisotropic material, is passed undeflected, while the other beam component is deflected or reflected.

If  $n_p$  is equal or substantially equal to  $n_o$ , the ordinary beam is passed undeflected by an interface between isotropic material and anisotropic material, and if  $n_p$  is equal or substantially equal to  $n_e$ , such an interface passes the extraordinary beam undeflected.

Deflected beam components incident on the light guide-air interface at an angle smaller than the critical angle are coupled out again and the polarizer again passes light of the proper polarization, which is subsequently reflected by the reflective electrodes of the

display panel.

Preferably, the direction of polarization of the polarizing means is the same as that of the polarizer. In that case, in display panels based, for example, on (twisted) nematic liquid-crystal effects and ferro-electric effects no light is lost. If the directions of polarization of the polarizing means and the polarizer are different, light loss can be precluded by using a phase plate.

The above-mentioned polarisation-separation can be achieved in various ways.

A first embodiment of the invention is characterized in that the light guide is provided with a layer, for example a coating, of a material which differs from that of the other part of the light guide, and in that the polarizing means are formed by a profiled interface between the layer and the other part of the light guide, the material of the other part of the light guide or of the layer being optically anisotropic, while the other material is optically isotropic.

A second embodiment is characterized in that the light guide is provided with a number of recesses comprising a material which differs from that of the other part of the light guide, and in that the polarizing means are formed by interfaces between the recesses and the other part of the light guide, the material of the other part of the light guide or the material in the recesses being optically anisotropic, while the other material is optically isotropic.

Such a light guide is known per se from WO 97/08582 (PHN 15.415).

In said document, light rays incident on the light guide-air interface at a surface situated opposite the exit surface of the light guide at an angle smaller than the critical angle are prevented from being coupled out by furnishing said surface with a reflector. However, such a reflector cannot be used in an illumination system for reflective panels.

To preclude such coupling-out of light rays, a further preferred embodiment of a display device in accordance with the invention is characterized in that coupling-in means are situated between a light source and the light guide, which means limit the angle between a coupled-in light ray and a plane of the light guide parallel to the exit face to maximally 15 degrees.

Preferably, for the optically isotropic part of the light guide,  $n_p$  is equal or substantially equal to  $n_o$ .

For polymers applicable in such a light guide it generally applies that  $n_e$  is

relatively high, and the above-mentioned choice can be realized more readily than  $n_p$  being equal or substantially equal to  $n_e$ . For the optically anisotropic material, preferably, an anisotropic polymer gel or an anisotropic polymeric network is selected.

These materials can very suitably be used as a birefringent material for  
5 applying the coating or filling the recesses, requiring only small quantities.

These and other aspects of the invention will be apparent from and elucidated with reference to the embodiments described hereinafter.

10 In the drawings:

Fig. 1 is a sectional view of an embodiment of a reflective display device in accordance with the invention.

A display device 1 schematically shown in Fig. 1, comprises a display panel 2 and an illumination system 7.

15 The display panel 2 comprises, between two substrates 3, 4, a liquid-crystalline material 5 the action of which is based on the twisted nematic (TN), super-twisted nematic (STN) or ferro-electric effect to modulate the direction of polarization of light incident thereon. The display panel includes, for example, a matrix of pixels for which light-reflecting picture electrodes 6 are arranged on the substrate 3. The substrate 4 is light-  
20 transmitting. For the sake of simplicity, it is assumed that in Fig. 1 only one picture electrode 6 is shown. The display panel further comprises a polarizer 14.

The illumination system 3 comprises a light guide 7 which is made of an optically transparent material and includes four end faces 10, 10'. Opposite one of said end faces, for example 10, there is arranged a light source 12 whose light is coupled into the  
25 light guide 7 via the end face 10. Said light source 12 may be, for example, a rod-shaped fluorescent lamp. The light source may also be formed by, for example, one or more light-emitting diodes (LED), particularly in flat display devices with small display panels, such as a mobile telephone. The light source 12 may additionally be detachable.

The exit surface 9 of the light guide 7 faces the display panel 2.

30 To ensure that the light originating from the illumination system 7 is polarized light, in this example, the light guide 7 is divided into two parts made of a different material, which are separated from each other by a saw tooth profile, one of the materials (15) being isotropic and the other material (16) being anisotropic.

Polarization separation occurs at the interfaces between isotropic and

anisotropic material. Also recesses filled with different materials can be provided in a surface of the light guide, which may be the exit surface 9 as well as the opposite surface 24. For other variants of the light guide, as well as for the materials used therein, reference is made to the above-cited patent application WO 97/08582.

5 Each end face 10' of the transparent plate, where no light is coupled in, can be provided with a reflector 22. In this manner, it is precluded that light which was not coupled out at the exit surface 9 and hence propagates through the light guide and arrives at an end face, leaves the light guide 11 via the end face 10'.

Polarization separation takes place at the interfaces 17 between isotropic  
10 and anisotropic material. If an unpolarized light beam originating from the light source 12 is incident on such an interface, this beam will be separated into two beam components 19, 19' having mutually perpendicular directions of polarization. (For clarity, the beam shown in Fig. 1 is already separated into these components when it leaves the light source.) To ensure that polarization separation takes place, it must hold for the isotropic material having  
15 refractive index  $n_p$  and for the anisotropic material having refractive indices  $n_o$  and  $n_e$ , that one of the indices  $n_o$  or  $n_e$  is equal or substantially equal to  $n_p$ . In this example, the beam component 19', whose direction of polarization extends transversely to the plane of the drawing, propagates towards the interface 17, where it is refracted in the direction of the exit surface 9 and, if it is incident at an angle above the critical angle, it will be reflected there so  
20 as to achieve total internal reflection. If the angle of incidence is smaller than said critical angle, the component will leave the light guide 7. The beam component 19 whose direction of polarization lies in the plane of the drawing propagates, in this example, towards the interface 24 and, if it is incident at an angle above the critical angle, it will be reflected there so as to achieve total internal reflection. If the angle of incidence is smaller than the critical  
25 angle, the component will leave the light guide 7. In the case of internal reflection at the exit surfaces 9, 24, the beam component 19 is reflected and will propagate through the light guide 7, which may result in said beam component being depolarized. The depolarized beam component will eventually reach an interface 17 and, subsequently, be polarized as described hereinabove. It is alternatively possible that this component or a part thereof reaches the end  
30 face 10 where it is depolarized, so that, upon reaching the interface 17, the portion having the desired direction of polarization will be selected. In general, some degree of birefringence occurs in the light guide, as a result of which the direction of polarization of the beam components 19, 19' undergoes a change. As a result, light is coupled out which would otherwise remain trapped in the guide as a result of internal reflection.

To preclude that light leaves the light guide 7 without contributing to the light output of the illumination system, light of the lamp 12 is preferably coupled into the light guide 7 via coupling-in means 13, for example by means of a wedge-shaped light guide which limits the angle of the ingoing beam relative to the exit surfaces 9, 24 to 15 degrees.

5 Moreover, as stray light does not occur, this results in an increased contrast.

After reflection in the display panel 2, the beam 19' is propagated through the light guide (refraction as a result of different refractive indices is presumed to be negligible for this example) and reaches the viewer 20.

If there is sufficient ambient light, for example light originating from a lamp 25 or another external light source, an incident beam is separated into two beam components 18, 18' having mutually perpendicular directions of polarization (for clarity, the beam shown in Fig. 1 is already separated into these components when it leaves the light source). As one of the two refractive indices of the layer 16 is greater than that of the part 15 of the light guide 7, in this example, the beam component 18', whose direction of polarization extends transversely to the plane of the drawing, is refracted towards the normal, while the other beam component propagates substantially unrefracted. As these beam components generally make a smaller angle with the normal than the beam 19, 19', both beam components propagate as far as the display panel 2. The beam component 18 whose direction of polarization extends in the plane of the drawing, is absorbed by the polarizer 14, while the beam component 18' whose direction of polarization extends transversely to the plane of the drawing is passed. Subsequently, after reflection in the display panel 2, the beam component 18' is propagated through the light guide (refraction as a result of different refractive indices is again presumed to be negligible) and reaches the viewer 20.

By virtue thereof, the display device can very suitably be used with (beam 19, 19') and without (beam 18, 18') the lamp 12 (side-light).

In the foregoing, it is assumed that the direction of polarization of the polarizing means (and hence of the beams 18', 19') is the same as that of the polarizer 14. In practice, however, this is not always the case, for example, because the direction of polarization of the polarizer 14 is chosen to be parallel to the direction of orientation of the liquid-crystal molecules. To preclude loss of light, a phase plate 21, indicated by interrupted lines, is shown in Fig. 1, which rotates the polarization axis in such a manner that this loss is (substantially) prevented.

As described hereinabove, various variants of light guides are possible, for example those described, inter alia, in WO 97/08582. For example, the polarizing means



may alternatively be situated at the exit surface 24. It is also possible to employ the sawtooth of Fig. 1 with a variable pitch which, for example, decreases as the distance to the lamp 12 is larger.

The picture electrodes 6 do not have to be light reflecting. In an  
5 alternative embodiment, these picture electrodes are used as light-transmitting ITO electrodes, and a mirror is situated behind these electrodes.

In summary, the invention relates to a display device comprising a front-  
light illumination system furnished with a light guide, which can be switched off in the case  
of ambient light. The light guide is based on polarization separation at the interface between  
10 two materials having different refractive indices, whereby for one beam component the  
refractive index in both materials is the same, while for the other beam component the  
refractive indices are different.

## CLAIMS:

1. A display device comprising a display panel with a first substrate provided with light-reflecting electrodes at the location of pixels, a second light-transmitting substrate and liquid-crystalline material between the two substrates, an illumination system which is situated on the side of the second substrate facing away from the liquid-crystalline material and which includes a light guide of an optically transparent material having an exit surface facing the display panel and a number of end faces, an entrance face for light being situated opposite at least one of said end faces, whereby the light can be coupled in at that end face of the light guide, characterized in that a polarizer is situated between the light guide and the display panel, and the light guide comprises polarizing means for polarizing the incoming light.
2. A display device as claimed in claim 1, characterized in that the polarizing means are situated at the location of an exit surface of the light guide.
3. A display device as claimed in claim 1, characterized in that the direction of polarization of the light emanating via the polarizing means is the same as that of the polarizer.
4. A display device as claimed in claim 1, characterized in that coupling-in means are situated between a light source and the light guide, which means limit the angle between a coupled-in light ray and a plane of the light guide parallel to the exit face to maximally 15 degrees.
5. A display device as claimed in claim 1, characterized in that for the ingoing light polarization separation occurs at the interface between two materials having a different refractive index, whereby for one beam component the refractive index in both materials is the same, while for the other beam component the refractive indices are different.

6. A display device as claimed in claim 5, characterized in that the light guide is provided with a layer of a material which differs from that of the other part of the light guide, and in that the polarizing means are formed by a profiled interface between the layer and the other part of the light guide, the material of the other part of the light guide or  
5 of the layer being optically anisotropic, while the other material is optically isotropic.

7. A display device as claimed in claim 5, characterized in that the light guide is provided with a number of recesses comprising a material which differs from that of the other part of the light guide, and in that the polarizing means are formed by interfaces  
10 between the recesses and the other part of the light guide, the material of the other part of the light guide or the material in the recesses being optically anisotropic, while the other material is optically isotropic.

8. A display device as claimed in claim 6, characterized in that the interface  
15 between the layer and the other part of the light guide is in the shape of a saw tooth profile.

9. A display device as claimed in claim 1, characterized in that a phase plate is situated between the light guide and the display panel.

20 10. A display device as claimed in claim 1, characterized in that the display device is provided with a light source on the side of the entrance face for light.

1/1

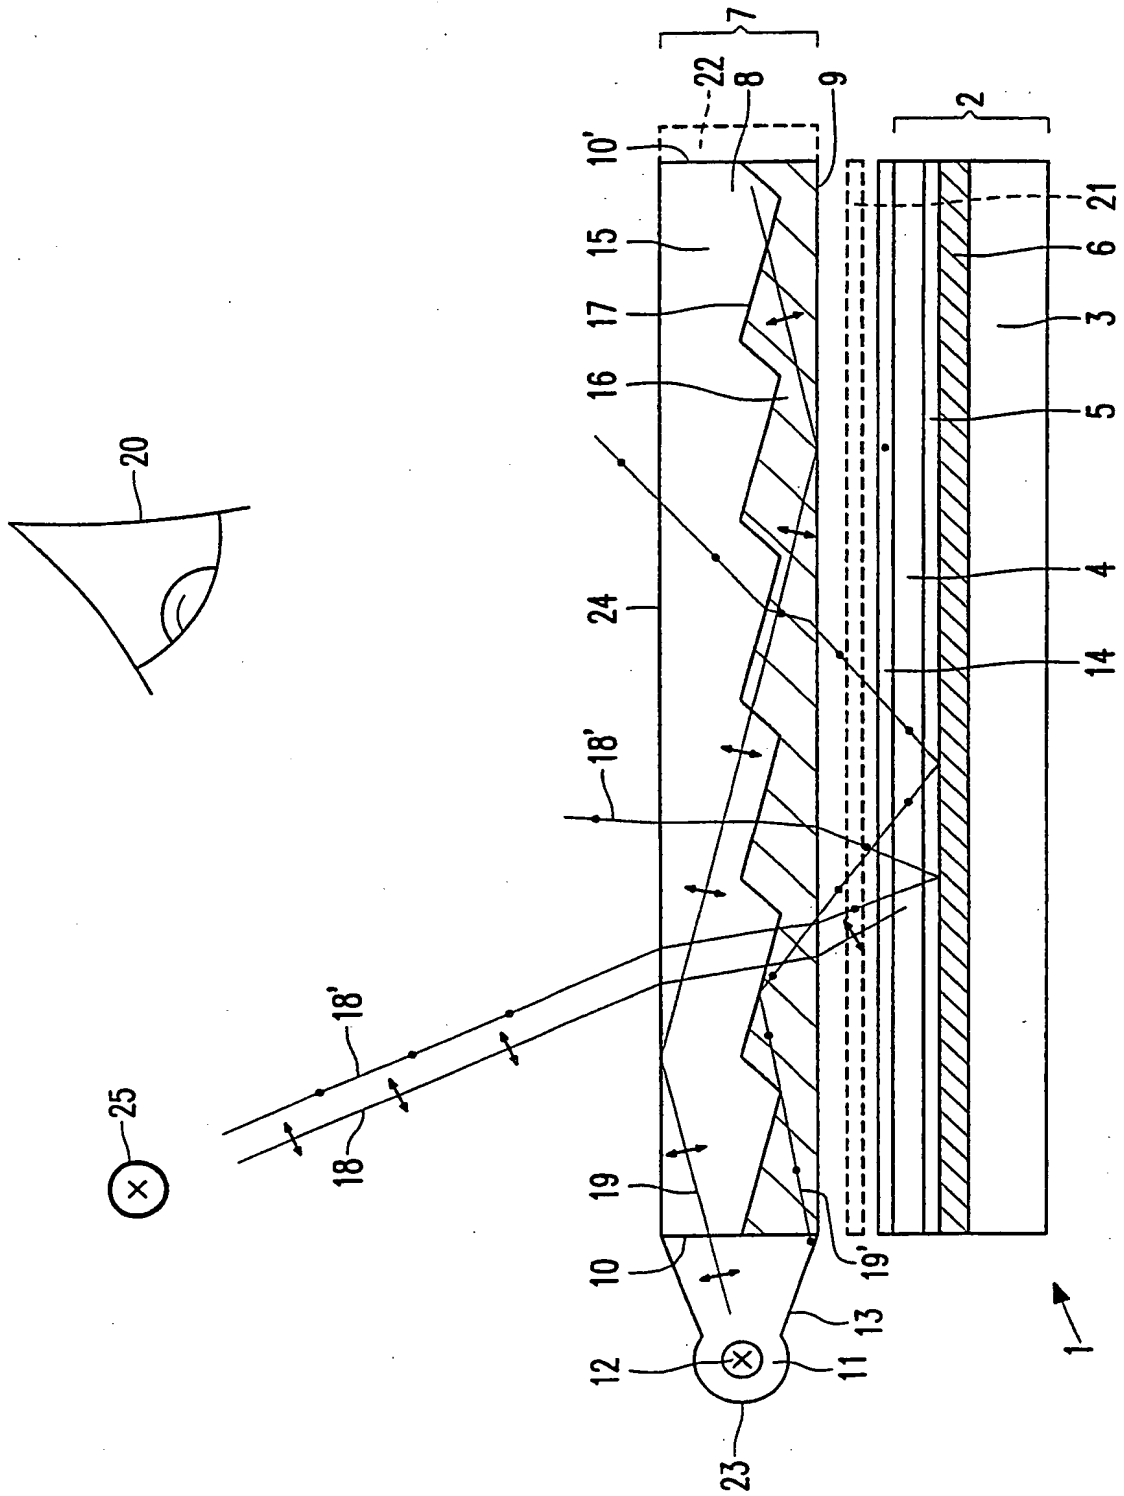


FIG. 1

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 98/01572

## A. CLASSIFICATION OF SUBJECT MATTER

IPC6: G02F 1/1335, F21V 8/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: G02F, F21V

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPODOC; WPI

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0778484 A2 (CANON KABUSHIKI KAISHA), 11 June 1997 (11.06.97), page 3, line 13 - line 30; page 3, line 57 - page 4, line 20; page 5, line 15 - line 18, figures 3-6, abstract	1-5,9-10
X	WO 9708582 A1 (PHILIPS NORDEN AB), 6 March 1997 (06.03.97), page 2, line 17 - line 22; page 9, line 27 - line 31; page 11, line 18 - line 22, figures 4,6, abstract, page 11, line 30 - page 12, line 1	1-3,5-10
Y		4

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

- \* Special categories of cited documents:
- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
8 April 1999	19-04-1999
Name and mailing address of the ISA/ Swedish Patent Office Box 5055, S-102 42 STOCKHOLM Facsimile No. +46 8 666 02 86	Authorized officer  Karin Säfsten Telephone No. +46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1992)

# INTERNATIONAL SEARCH REPORT

International application No.

PCT/IB 98/01572

## C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	Applications Digest, 1996, C.-Y. Tai, "Compact Front Lighting for Reflective Displays, SID 96 Application Digest, pp 43-46", page 43, column 2, line 7 - line 20, abstract	4
A		1-3,5-10
P,A	WO 9812593 A1 (PHILIPS ELECTRONICS N.V. ET AL.), 26 March 1998 (26.03.98), figure 1, abstract	1-3,5,10

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

**INTERNATIONAL SEARCH REPORT**  
Information on patent family members

02/03/99

International application No.

PCT/IB 98/01572

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
EP	0778484	A2	11/06/97	JP	9218407 A	19/08/97
WO	9708582	A1	06/03/97	CN	1166209 A	26/11/97
				EP	0787316 A	06/08/97
				JP	10508151 T	04/08/98
				US	5729311 A	17/03/98
WO	9812593	A1	26/03/98	EP	0868681 A	07/10/98
				US	5845035 A	01/12/98

Form PCT/ISA/210 (patent family annex) (July 1992)

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☒ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☒ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**